

Product features

small-volume

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	6	~	18	GHz
Dynamic range	-40	~	15	dBm
VSWR		2		
Rising edge		5		ns
Falling edge		20		ns
Detection voltage range		0-5		V
Max input power		18		dBm
Max voltage input		5.5		V
Polarity of detection voltage		+		


Other parameters

Connector	SMA-K
Connector material	Stainless steel
Working voltage	+5V
Working current	2mA
Work Temp.	-40~+75°C Design assurance
Storage Temp.	-40~+85°C Design assurance

Reference picture



Configuration (mm)

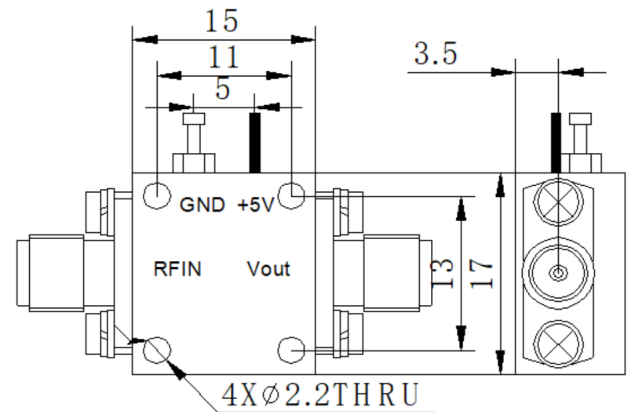

Note

1	Please do not wash the product in the cleaning solution. Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.