

Product features

small-volume

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	9000	~	10000	MHz
Polarity of detection voltage		Positive polarity		
VSWR		2		
Dynamic range	-30	~	10	dBm
Rising edge			50	ns
Falling edge			50	ns
Detection voltage		1.5V @ input +3dBm		ns
Detection voltage range	0		5	V
Input signal pulse width	0.3			us


Other parameters

Connector	SMA
Working voltage	5V
Working current	100mA
Work Temp.	-30~+65°C Design assurance

Reference picture



Configuration(mm)

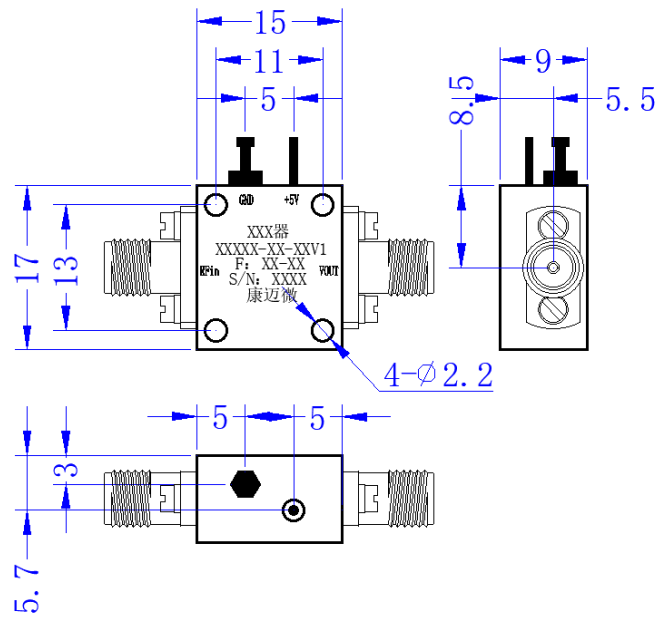

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
---	---