

Product features

Broadband, small volume.

Main specifications

| Parameters | Min | Typical | Max | Units |
|---------------|-----|---------|-----|-------|
| Frequency | 2 | ~ | 18 | GHz |
| Dynamic range | -20 | ~ | +20 | dBm |
| VSWR | | 1.8 | | |
| Rising edge | | 30 | | ns |
| Falling edge | | 200 | | ns |


Other parameters

| | |
|--------------------|----------------------------|
| Connector | SMA-K |
| Connector material | Stainless steel |
| Surface | Gold-plating |
| Working voltage | +5V |
| Work Temp. | -40~+70°C Design assurance |

Reference picture



Configuration (mm)

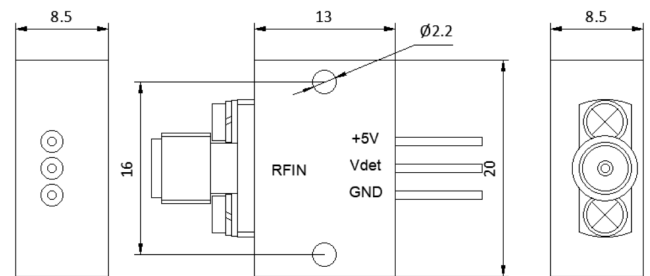

Note

| | |
|---|---|
| 1 | Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution. |
| 2 | If the temperature is higher than 125°C, consult with us before ordering. |